



[wti.com/combo](http://wti.com/combo)

## Console Server + PDU Manager CPM Series

# Out-of-Band Console Access + Power Control + ATS Revive Network Services...Anytime, Anywhere!

**NEW!**



**Updated 3rd Gen Processor Engine**  
For Quick Emergency Response



**Dual 10/100/1000 Ethernet**  
For Redundant Access on GigE Networks



**4G LTE Cellular**  
For IoT Mobile Private Networks



**CPM-800-1-EM**  
**Dual Gigabit Ethernet + Built-in Modem**

### IP-to-Serial Console Management:

- 8 or 16 RS232 RJ45 Serial Console Ports
- SSH/Telnet/Raw-Socket TCP Connection
- SNMP Control, Monitoring & Configuration (Supports SNMP Versions 1, 2C and 3)
- Ctrl+Break Command Block Options
- Reverse/Outbound SSH

### Remote Power Management:

- Dual 20 Amp Power Supplies (Four 20 Amp Power Supplies on CPM-1600 Models)
- Automatic Transfer Switch (ATS) Models For Failsafe Power
- Per Outlet Current Metering & Alarming (Optional)
- On/Off/Reboot/Default/Load Shed Switching
- Outlet Sequencing & Power Up Delays
- Scheduled Outlet Switching/ Reboot
- Ping Watchdog with Auto Reboot
- 8 or 16 Switchable NEMA 5-15R or IEC C13 Outlets
- 120 VAC and 240 VAC Models

### In-Band/Out-of-Band Access:

- Single or Dual 10/100/1000 Base-T Ethernet with Failback Capabilities
- Optional 56k v.92 Modem with Dialback Security
- Optional 4G LTE Cellular
- Local Access (RJ45 RS232 & USB Mini Set-up Ports)
- Supports Both IPv4 and IPv6


### Security & Authentication:

- HTTPS/SSL/TLS, SSHv2, SNMPv3
- Embedded Validated FIPS 140-2 Cryptographic Module
- LDAP/Kerberos/RADIUS/TACACS+
- Port- & Plug Specific Password Protection
- Multi-Level Subscriber Directory
- IP Address Filtering
- Invalid Access Lockout & Alarm

The CPM Console Server + PDU Manager is a comprehensive Out-of-Band Rescue™ solution including all the remote network management tools you need in a single package.

When your network is down or unresponsive, the CPM allows you to access, troubleshoot and revive network services from a single secure session. SSH to multiple console or maintenance ports and reconfigure your missions critical devices as well as remotely control power on individual outlets.

The CPM Console Server + PDU Manager offers lights out management of your LAN/WAN infrastructure providing event monitoring, logging and notification alarms for the NOC. The CPM can be globally deployed and managed as a stand alone unit or a complete enterprise Out-of-Band Rescue™ solution.

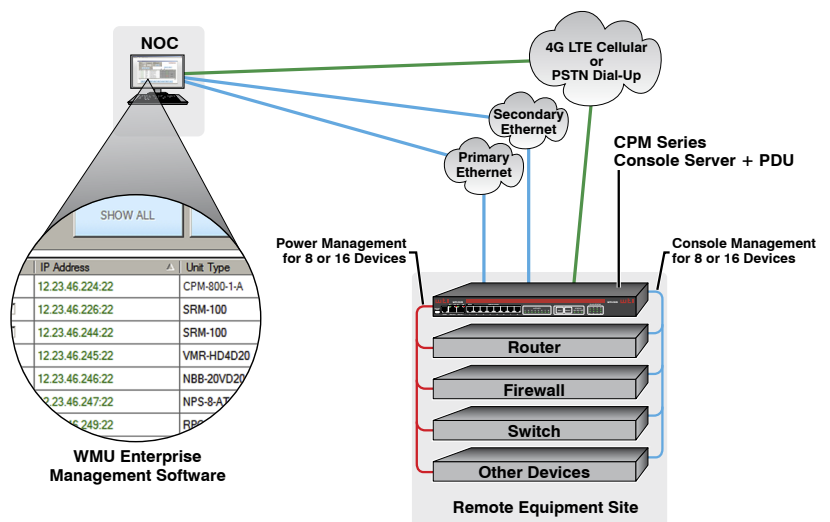

**OUT-OF-BAND RESCUE™**



# Console Server + PDU Manager

## CPM Series

Model Number	Outlets	RS232 Ports	AC Voltage 50/60 Hz	Power Dist. (80% Derated)	Input Feeds	Power Cord (Detachable)	Optional Add-On Features				
							Dual Ethernet	Dial-Up Modem	4G LTE Cellular	ATS	Current Metering
CPM-800-1	(8) NEMA 5-15R	8	100/120V	3.2/3.8 kW	(2) 20 Amp	C19 to NEMA 5-15P, 8'	10/100/1000	v.92	4G LTE	Yes*	Yes
CPM-800-2	(8) IEC 60320 C13	8	100/240V**	3.2/7.6 kW	(2) 20 Amp	(Sold Separately)	10/100/1000	v.92	4G LTE	Yes*	Yes
CPM-1600-1	(16) NEMA 5-15R	16	100/120V	6.4/7.6 kW	(4) 20 Amp	C19 to NEMA 5-15P, 8'	10/100/1000	v.92	4G LTE	Yes*	Yes
CPM-1600-2	(16) IEC 60320 C13	16	100/240V**	6.4/15.3 kW	(4) 20 Amp	(Sold Separately)	10/100/1000	v.92	4G LTE	Yes*	Yes

\* ATS feature requires each input to be loaded no more than 50% capacity of total Power Distribution

\*\* 200/240V AC power supply with ATS Optional Add-on

Model Number Key	Sample Model Number: CPM 800 1 1 ECAM				
<b>Series</b>					
CPM Console Server + PDU Combo					
<b>Ports/Outlets</b>					
800 8 Ports/8 Outlets		1600 16 Ports/16 Outlets			
<b>Outlet Type</b>					
1 NEMA 5-15R		2 IEC 60320 C13			
<b>Add-On Features</b>					
E Dual Ethernet/Dual Power		C Current Metering			
A Automatic Transfer Switch		M Dial-Up Modem			
4G LTE Cellular Requires Additional W4G-VZW or W4G-ATT Part Numbers					

### Event Monitoring, Logging & Notification:

- Alarms via SNMP, Email or Text Message
- Over-Temperature Alarms
- Ping-No-Answer Alarm (Failed Ping Command)
- Power Cycle & Lost Voltage Alarms
- Temperature, Command & Event Logging
- Buffer Threshold Alarm
- No Dialtone & Lost Communication Alarms
- Time Stamp & Non-Connect Port Buffering
- SYSLOG Messages

### Unit Management:

- CLI & Web-Based GUI
- Compatible with WMU Enterprise Management Software
- Multiple Concurrent SSH Sessions
- Full MIB Support
- NTP for True Server Sync



- ✓ 5 Year Warranty
- ✓ Stocked for Same Day Shipments
- ✓ In-House Design & Manufacturing
- ✓ Made In USA



<b>Ethernet Port(s):</b>	10/100/1000 BaseT, RJ45
<b>Internal Modem Option:</b>	56K v.92 Internal Modem with Dialback Security
<b>Internal Cellular Option:</b>	4G LTE for Verizon, AT&T or EU
<b>Operating Temperature:</b>	32°F - 140°F (0°C - 60°C)
<b>Humidity:</b>	10 - 90% RH
<b>CPM-800 Dimensions:</b>	Height: 1.75" (4.4 cm), 1 Rack U Width: 17.15" (43.6 cm) Depth: 8.7" (22.1 cm)
<b>CPM-1600 Dimensions:</b>	Height: 3.5" (8.9 cm), 2 Rack U Width: 17.15" (43.6 cm) Depth: 12.5" (31.8 cm)
<b>Shipping Weight:</b>	
CPM-800 Series:	10 Lbs (4.5 Kgs)
CPM-1600 Series:	22 Lbs. (10 Kgs)
<b>Mounting:</b>	19" Rack Brackets Included
<b>Approvals:</b>	UL, cUL, CE, FCC Class A



**CPM-1600-1-ECM**  
Dual GigE, 16 Port Console Server + 16 Outlet PDU

## OUT-OF-BAND RESCUE™

WTI - Western Telematic, Inc.

5 Sterling • Irvine • California 92618-2517 • Toll Free (800) 854-7226 • Email: info@wti.com • Web: www.wti.com

© Copyright 2017 Western Telematic, Incorporated  
CPM170126